

Pumped Outlet from WWT Tank

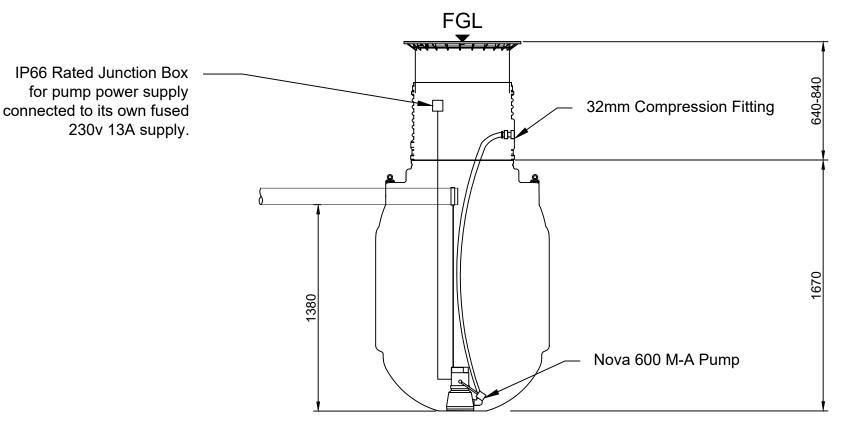

Performance Curve for Nova 600 M-A Pump

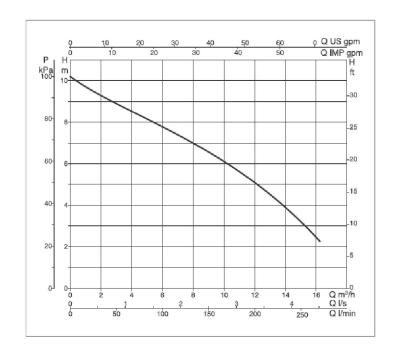

THIS DOCUMENT IS SUPPLIED IN STRICT CONFIDENCE AND MUST NOT BE LENT, REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE WRITTEN CONSENT OF GRAF UK LTD LIMITED

DO NOT SCALE - IF IN DOUBT ASK

330361 - 1200 litre Saphir Tank

- 500mm Extension Sleeve (can be supplied in 750/1000mm lengths) 371015

371010 371010 - Telescopic Pedestrian Loading Lid 103005744H- Nova 600 M-A (230v)

- M8 Steel Rod = 1000mm - M8 Steel Nut = 2 375140

375140 - M8 Steel Washer = 2 710381 - 1 ½" Male Nipple = 1

405032 - 1 ½" Non-Return Valve = 1

706234 - 1 ¼ Male x 32mm Compression Elbow = 1 706532 - 32mm Compression Elbow = 1 353710 - 32mm Insert = 4 32mm MDPE Pipe (black) = 1250mm

32mm MDPE Pipe (black) = 350mm 332033 - DN100 Special Seal = 1

330383 - DN19/32mm Special Seal = 1

330533 - 4" HT Pipe (grey) = 700mm 60580 - Wiska Junction Box = 1

10100612 - Cable Gland = 2

P0 FOR APPROVAL

REV. DESCRIPTION

FOR GUIDANCE



T: 01608 661500 F: 01295 211333 E: info@grafuk.co.uk

DATE: 08.11.19 DRAWN:

CHECKED: MC

SCALE: NTS@A3

DS 08.11.19

BY

PUMPED OUTLET

PUMPED OUTLET FROM TREATMENT PLANT

REV.

NOVA 600 M-A.001

P0